



Durico C&T, Inc.
 Oedap 6-gil, 33, Sangju-Si,
 Gyeongbuk 742-320, Korea
 Tel.:+82-2-525-8405, Fax: +82-2-525-7461
 Email: info@durico.co.kr

SPECIFICATION SHEET

MODEL NO.: S-S & Durico-S

Revised 06-JAN-17

APPLICATION


This product is a general-purpose product and the image is expressed after output. This product is easy to check the output image when inserting it into the printer.

PHYSICAL PROPERTIES

<u>Property</u>	<u>Unit</u>	<u>S- S</u>	<u>Durico - S</u>	<u>Test Method</u>
Basis Weight	g/m ²	69.6	71.1	TAPPI T-410
Thickness	μm	76	81	ISO 534
Glossiness	%	82.5	53.6	ASTM D523
Whiteness	%	98.72	97.24	ASTM E313

SENSITIVITY

<u>Property</u>	<u>Unit</u>	<u>S- S</u>	<u>Durico - S</u>	<u>Test Method</u>
Image Density (Dmax)	O.D	1.3	1.43	ISO 13655
Energy Density (O.D 12)	O.D	0.77	0.71	ISO 13655
Energy Density (O.D 9)	O.D	0.5	0.48	ISO 13655
Energy Density (O.D 6)	O.D	0.26	0.21	ISO 13655
Background Density	O.D	0.11	0.08	ISO 13655

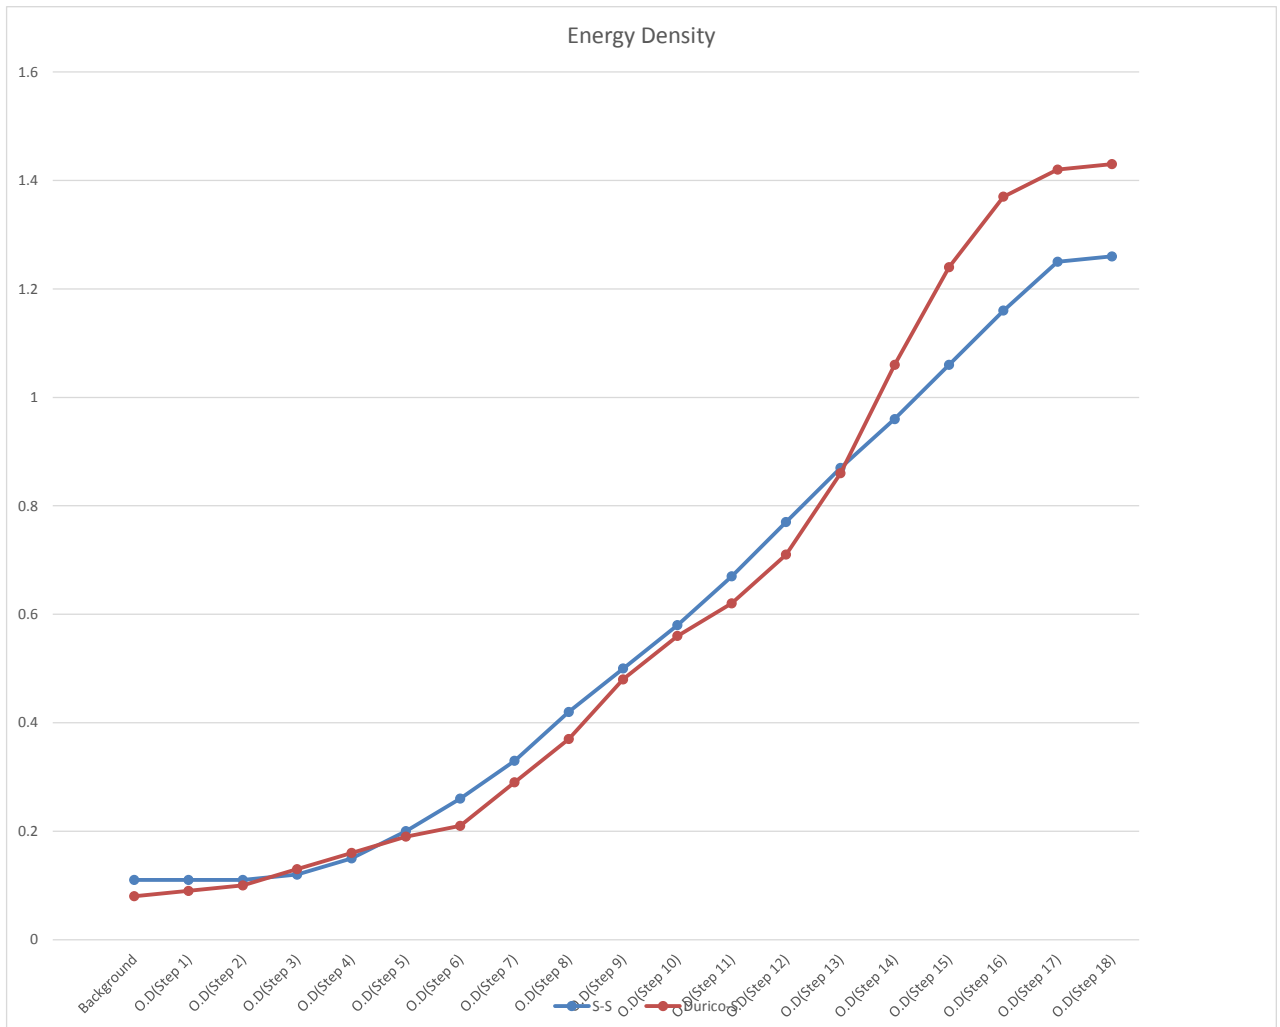

- Remark:**
1. The data in this specification sheet represents averages and does not constitute a warranty.
 2. All products should be pretested to determine suitability for any specific application & purpose including pre-printing performance.